


## UC500 AS23 Cat.6<sub>A</sub>

### F/FTP AWG23/1 installation cable

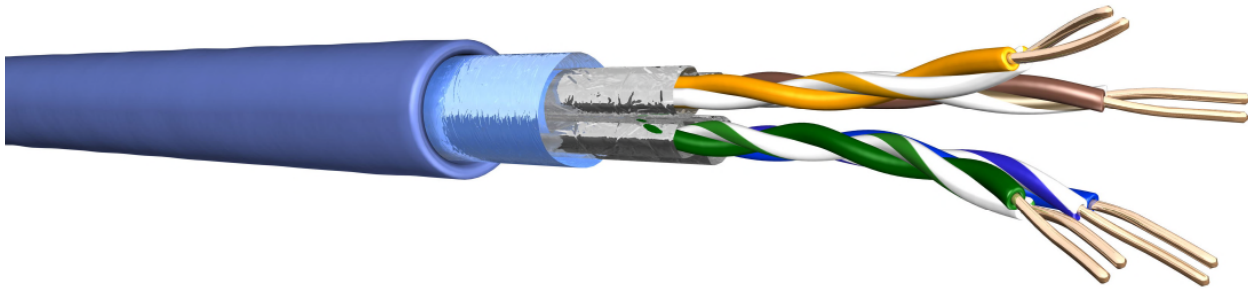

### Application

Primary (Campus), Secondary (Riser), Tertiary (Horizontal)  
IEEE 802.3: 10Base-T; 100Base-T; 1000Base-T; 10GBase-T  
IEEE 802.5 16 MB; ISDN; FDDI; ATM  
Power over Ethernet (PoE) / PoE+

### Standards

EN 50173-1; EN 50288-10-1  
ISO/IEC 11801; IEC 61156-5  
TIA/EIA-568-B.2  
IEEE 802.3at

### Flame resistance

EN 50399: Class D<sub>ca</sub>s2d2a1  
LSHF D<sub>ca</sub>: IEC 60332-1; IEC 60754-2; IEC 61034

### Construction

Conductor	bare copper wire Ø 0.56 mm (AWG23/1)
Insulation	Foamskin Polyethylene, Ø 1.35 mm
Stranding	2 cores to the pair
Pair screen	High Performance FTP: Al-laminated plastic foil, patented wrapping of two pairs each
Cable lay up	4x2 pairs to the core
Screen	Advanced screen: Al-laminated plastic foil, drain wire AWG26 tinned
Sheath	LSHF D <sub>ca</sub> , blue RAL 5024 Duplex sheath: two cables parallel, separable

### Mechanical properties

Bending radius	without load	4 x D
	with load	8 x D
Temperature range	during operation	-20°C to + 60°C
	during installation	0°C to + 50°C

## UC500 AS23 Cat.6<sub>A</sub>

### Electrical properties

at 20°C ± 5°C

Loop resistance		≤ 156 Ω/km	
Resistance unbalance		≤ 2%	
Insulation resistance	(500 V)	≥ 2000 MΩ*km	
Mutual capacitance	at 800 Hz	Nom. 43 nF/km	
Capacitance unbalance	(pair/ground)	≤ 1500 pF/km	
Mean characteristic impedance	100 MHz	100 ± 5Ω	
Nominal velocity of propagation		ca. 79 %	
Propagation delay		427 ns/100m	
Delay skew		12 ns/100m	
Test voltage	(DC, 1 min) core/core and core/screen	1000 V	
Transfer impedance	at 1 MHz	≤ 20 mΩ / m	Grade 2
	at 10 MHz	≤ 50 mΩ / m	
	at 30 MHz	≤ 100 mΩ / m	
Coupling attenuation		55 dB	Type 2
Segregation classification acc. EN 50174-2		„C“	

### Electrical data (nominal)

acc. to Cat.6A (at 20°C)

F (MHZ)	Attenuation (dB/100m)	NEXT (dB)	PS-NEXT (dB)	ACR (dB/100m)	PS-ACR (dB/100m)	ACRF (dB/100m)	PS-ACRF (dB/100m)	Return loss (dB)
1.0	1.8	100	97	98	95	105	105	-
4.0	3.4	100	97	97	94	105	102	27
10.0	5.4	100	97	95	92	97	94	30
16.0	6.8	100	97	93	90	93	90	30
20.0	7.7	100	97	92	89	91	88	30
31.2	9.6	100	97	90	87	87	84	30
62.5	13.7	100	97	86	83	81	78	30
100.0	17.4	100	97	83	80	77	74	30
125.0	19.5	95	92	75	72	75	72	26
155.5	21.9	94	91	72	69	73	70	26
175.0	23.3	93	90	70	67	72	69	25
200.0	25.0	92	89	67	64	71	68	25
250.0	28.1	90	87	62	59	69	66	24
300.0	30.9	89	86	58	55	67	64	24
400.0	38.3	87	84	48	45	64	61	23
500.0	44.8	85	82	40	37	61	58	22

## UC500 AS23 Cat.6<sub>A</sub>

### Technical data

Product Reference Code	Cable type	Brand name	Outer diameter Mm	Euro Class	Fire load		Weight kg/km	Copper content	Tensile force N
					MJ/km	kWh/m			
60060190	J-02YS(St)H 4x2x0.56	UC500 AS23 Cat.6 <sub>A</sub> F/FTP 4P LSHF D <sub>ca</sub>	7.1	D <sub>ca</sub> s2d2a1	501	0.139	47	24	100
60060423	J-02YS(St)H 2x(4x2x0.56)	UC500 AS23 Cat.6 <sub>A</sub> F/FTP 2x4P LSHF D <sub>ca</sub>	7.1/14.3	D <sub>ca</sub> s2d2a1	1002	0.278	94	48	200

### Product Code Table

Produkt Beschreibung	PG Referenz Code	PG Artikel Nummer
UC500 AS 23 C6A F/FTP 4P LSHF D <sub>ca</sub>	60060190	60060190
UC500 AS 23 C6A F/FTP 4P LSHF D <sub>ca</sub> 1000DW	60060190	60060421
UC500 AS 23 C6A F/FTP 4P LSHF D <sub>ca</sub> 500DW	60060190	60060422
UC500 AS 23 C6A F/FTP 2x4P LSHF D <sub>ca</sub>	60060423	60060423
UC500 AS 23 C6A F/FTP 2x4P LSHF D <sub>ca</sub> 500DW	60060423	60060424
UC500 AS 23 C6A F/FTP 2x4P LSHF D <sub>ca</sub> 1000DW	60060423	60060425

© PRYSMIAN GROUP 2011, All Rights Reserved

All sizes and values without tolerances are reference values. Specifications are for product as supplied by Prysmian Group: any modification or alteration afterwards of product may give different result.

The information contained within this document must not be copied, reprinted or reproduced in any form, either wholly or in part, without the written consent of Prysmian Group. The information is believed to be correct at the time of issue. Prysmian Group reserves the right to amend this specification without prior notice. This specification is not contractually valid unless specifically authorised by Prysmian Group.